



# **ROTABROACH® INDUSTRIAL PRODUCTS AND ACCESSORIES**




# TAKE CONTROL OF YOUR TOUGHEST PRODUCTION APPLICATIONS



## Rotabroach® - The Energy Saver


Rotabroach® Cutters require far less horsepower than twist drills of comparable size when run at the same feed rate. As a result, cutters can be run at higher feeds with higher metal removal rates while horsepower requirements are not increased. The geometry of Rotabroach Cutters is such that far less material is converted into chips than when using twist drills.

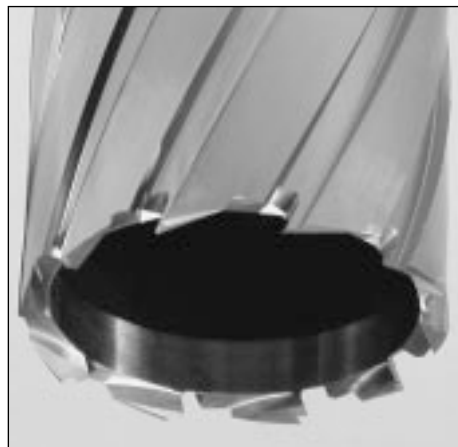

## Experience the Hougen-Edge®

Our exclusive and patented tooth geometry - the Hougen-Edge, is one of the reasons Rotabroach Cutters require less thrust and improve finish and tool life. The alternating tooth angles equalize forces to keep the cutter path straight, even thru the deepest holes.

More cutting edges at work during each revolution smooths out finishes and reduces chip loads per tooth as compared to twist drills. From three to 12 teeth per cutter, depending upon diameter, helps tools last longer, even at higher feed rates.

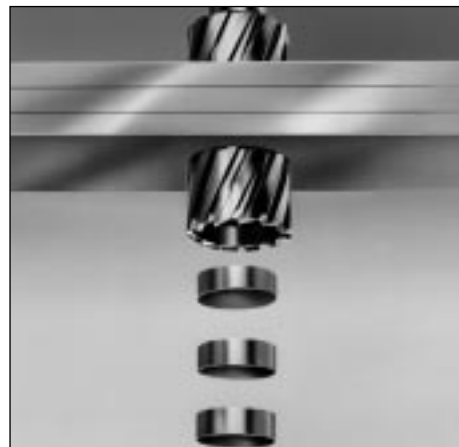


## Stack-Cut Geometry

Rotabroach Annular Cutters with a Stack-Cut tooth geometry must be used whenever two or more plates are being drilled simultaneously. With our exclusive end tooth design, stacked materials can typically be drilled in a single pass.

It should be noted that these modified cutters must be used when stack cutting. Non-modified Cutters cannot successfully cut through stacked material.

Stack-Cut\* and Flat Bottom Grooving tooth Geometry is available upon request on the cutters included in this catalog.

Hougen's Technical Service Department should be contacted whenever special tooth geometry and applications will be necessary.

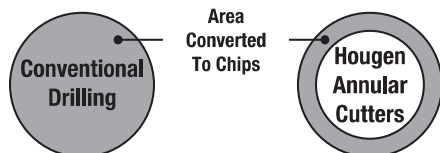

Applications involving turning, milling or drilling operations - for CNC systems or manual machines, even high production transfer equipment. In virtually every thru hole application, Rotabroach Industrial Cutters outperform conventional tooling. They even do the jobs impossible for conventional tooling, such as oblique entry holes, holes started on curved surfaces, arcs of holes, and face grooves. Some typical applications of Rotabroach Cutters with nontypical results for conventional tools include...

- A manufacturer of construction equipment needed to produce a 4-1/8" diameter hole thru 2-3/4" thick mild steel. Previously took 15 minutes and three passes to complete one hole. With Rotabroach, under one minute in one pass with a feed rate of 5 IPM.

- A producer of heat exchangers used conventional tools for a 2.015" hole thru 2-3/4" thick pressure vessel walls - it took 19 minutes. Rotabroach tools require just over one minute per hole, with over 600 lineal inches of holes produced per tool, per sharpening.

- A custom bicycle manufacturer uses Rotabroach Cutters to radius the ends of frame tubing to make a miter fit. End mills were used but slow feed rates, large burrs, distortion, and short tool life gobbled up time. With Rotabroach, the radius is now drilled with a 50% or more time savings, plus less time taken to deburr.

- A company producing weight lifting benches and racks uses Rotabroach Cutters to produce 1-1/8" diameter holes thru 0.120" thick tube walls in 15 seconds per hole. They're using a 1 HP motor to drive the spindle, a motor rated by its manufacturer to drill 1/2" maximum using twist drills.

- A manufacturer of coal handling equipment for power plants drills 3-1/2" holes thru 1-1/4" thick weldments. Twist drills distorted the material while taking nearly six minutes per hole. The Rotabroach advantage: a savings of approximately 5-1/2 minutes per hole and no deformation.

- A fabricator of nuclear components uses Rotabroach tools to put 2-3/4" holes thru 8-1/2" of 625 Inconel. A double savings of time (over six hours per hole saved) and money as value of the solid slug increased by \$150 per hole.

- Rotabroach tools also face groove - fast - as a manufacturer of high horsepower compressors discovered. Using 1/8" diameter end mills (one for roughing, one for finishing) and CNC machining centers with a circular interpolation program, the sealing V-groove took two hours and many broken tools to complete. For this application, Hougen engineers developed a special tooth geometry Rotabroach Cutter that completes the 7/16" deep groove in just 16 seconds. Rotabroach Cutters are used in all types of industries - • Construction • Fabrication • Aerospace • Automotive • Petroleum • Food processing equipment • Valves, piping, and pumps. - All saving time, and dollars with the Rotabroach Advantage.

# ROTABROACH® HEAVY-DUTY INDUSTRIAL CUTTERS



## • M2 H.S.S. Series

"53,000-Series" - 3" D.O.C.  
"54,000-Series" - 4" D.O.C.  
"56,000-Series" - 6" D.O.C.

## • M2 H.S.S. Series with TiN Coating

"33,000-Series" - 3" D.O.C.  
"34,000-Series" - 4" D.O.C.  
"36,000-Series" - 6" D.O.C.

## • M42 Premium H.S.S. Series

"63,000-Series" - 3" D.O.C.  
"64,000-Series" - 4" D.O.C.  
"66,000-Series" - 6" D.O.C.

## Heavy Duty Construction

Rotabroach Industrial Cutters are "tougher" tools which allow heavier feeds with increased speeds and deeper holes.

## Large Diameter & Deep Holes

Large diameters and special depths are available on request. Cutters are designed for use on conventional machine tools and machining centers and will lower your cost per hole in production applications. Set-ups require internal lubrication through the spindle or coolant inducer tool holder.

## Difficult-To-Machine Materials

Rotabroach Cutters will produce holes in many high-strength, exotic metals that are either difficult or impossible to machine by conventional tools... and the alternating tooth design of Hougén-Edge geometry provides smoother cutting action.

## TiN Coated For Extra Wear

Titanium Nitride coated M2 High Speed Steel Rotabroach Cutters are for 15 to 25% higher speeds, friction reduction, greater endurance, deep holes, and harder materials. The TiN coating reduces friction and operates at cooler temperatures while presenting a harder cutting edge.

## For Even Harder Materials

Cobalt grade H.S.S. Rotabroach Cutters provide maximum performance on hard materials (BHN 225 to 350) or materials with abrasive cutting characteristics. This tool can run typically at 10% higher speeds than M2 H.S.S.

Cutter Dia. (Inches)	Decimal Equivalent	No. of Teeth	Part No. 3" D.O.C.
<b>3/4" Diameter Weldon Shank</b>			
3/4	.7500	4	53074
13/16	.8125	4	53081
7/8	.8750	5	53088
15/16	.9375	5	53095
1	1.0000	6	53102
<b>* 1-1/64</b>	<b>1.0156</b>	<b>6</b>	<b>53104</b>
1-1/16	1.0625	6	53109
1-1/8	1.1250	6	53117
1-3/16	1.1875	6	53124
1-1/4	1.2500	6	53131
1-5/16	1.3125	6	53138
1-3/8	1.3750	6	53145
1-7/16	1.4375	6	53153
<b>1-1/4" Diameter Weldon Shank</b>			
1-1/2	1.5000	6	53160
<b>* 1-33/64</b>	<b>1.5156</b>	<b>8</b>	<b>53161</b>
1-9/16	1.5625	8	53167
1-5/8	1.6250	8	53174
1-11/16	1.6875	8	53181
1-3/4	1.7500	8	53188
1-13/16	1.8125	8	53196
1-7/8	1.8750	8	53203
1-15/16	1.9375	10	53210
2	2.0000	10	53217
<b>* 2-1/64</b>	<b>2.0156</b>	<b>10</b>	<b>53219</b>
2-1/32	2.0313	10	53221
2-1/16	2.0625	10	53224
2-1/8	2.1250	10	53231
2-3/16	2.1875	10	53239
2-1/4	2.2500	10	53246
2-5/16	2.3125	10	53253
2-3/8	2.3750	10	53260
2-7/16	2.4375	12	53267
2-1/2	2.5000	12	53274
<b>* 2-33/64</b>	<b>2.5156</b>	<b>12</b>	<b>53276</b>
2-17/32	2.5313	12	53278
2-9/16	2.5625	12	53282
2-5/8	2.6250	12	53289
2-11/16	2.6875	12	53296
2-3/4	2.7500	12	53303
2-13/16	2.8125	12	53310
2-7/8	2.8750	12	53318
2-15/16	2.9375	12	53325
3	3.0000	12	53332
<b>* 3-1/64</b>	<b>3.0156</b>	<b>12</b>	<b>53334</b>
3-1/16	3.0625	12	53339
<b>1-1/2" Diameter Weldon Shank</b>			
3-1/8	3.1250	12	53345
3-1/4	3.2500	12	53356
3-3/8	3.3750	12	53367
3-1/2	3.5000	12	53378
3-5/8	3.6250	12	53390
3-3/4	3.7500	12	53401
3-7/8	3.8750	12	53412
4	4.0000	12	53423

\* Tube Sheet Cutter diameters listed in bold. Most 3" D.O.C. Fractional cutters available in stock. Please refer to the Industrial Rotabroach Price List (#02819) for stocking status of all cutters.

Cutter Dia. (Metric)	Decimal Equivalent	No. of Teeth	Part No. 3" D.O.C.
<b>3/4" Diameter Weldon Shank</b>			
20	.7874	4	53078
21	.8268	5	53082
22	.8661	5	53087
23	.9055	5	53091
24	.9449	5	53096
25	.9843	6	53100
26	1.0236	6	53105
27	1.0630	6	53110
28	1.1024	6	53114
29	1.1417	6	53119
30	1.1811	6	53123
31	1.2205	6	53128
32	1.2598	6	53132
33	1.2992	6	53137
34	1.3386	6	53141
35	1.3779	6	53146
36	1.4173	6	53150
37	1.4567	6	53155
<b>1-1/4" Diameter Weldon Shank</b>			
38	1.4961	6	53159
39	1.3554	6	53164
40	1.5743	8	53168
41	1.6142	8	53173
42	1.6535	8	53177
43	1.6929	8	53182
44	1.7323	8	53186
45	1.7717	8	53191
46	1.8110	8	53195
47	1.8504	8	53200
48	1.8898	10	53204
49	1.9291	10	53209
50	1.9685	10	53213
51	2.0079	10	53218
52	2.0472	10	53223
53	2.0866	10	53227
54	2.1260	10	53232
55	2.1654	10	53236
56	2.2047	10	53241
57	2.2441	10	53245
58	2.2835	10	53250
59	2.3228	10	53254
60	2.3622	10	53259
61	2.4016	12	53263
62	2.4409	12	53268
63	2.4803	12	53272
64	2.5197	12	53277
65	2.5591	12	53281
66	2.5984	12	53286
67	2.6378	12	53290
68	2.6772	12	53295
69	2.7165	12	53299
70	2.7559	12	53304
71	2.7953	12	53308
72	2.8346	12	53313
73	2.8740	12	53317
74	2.9134	12	53322
75	2.9528	12	53326
76	2.9921	12	53331
77	3.0315	12	53336
78	3.0709	12	53340



# ROTABROACH® INDUSTRIAL CUTTERS



## • M2 H.S.S. Series

"42,000-Series" - 2" D.O.C.

"43,000-Series" - 3" D.O.C.

## • M2 H.S.S. Series with TiN Coating

"22,000-Series" - 2" D.O.C.

"23,000-Series" - 3" D.O.C.

## For Lighter Workloads

Designed for use in smaller, lower horsepower machines, these economical tools are equipped with either a .188" or .218" wall thickness to limit workloads, yet still provide high feed rates and speeds.

Cutter Dia. (Inches)	Decimal Equivalent	No. of Teeth	Part No. (M2 H.S.S.)
<b>3/4" Weldon Shank - 2" D.O.C.</b>			
3/4	.7500	4	42024
13/16	.8125	4	42026
7/8	.8750	5	42028
15/16	.9375	5	42030
1	1.0000	6	42032
1-1/16	1.0625	6	42034
1-1/8	1.1250	6	42036
1-3/16	1.1875	6	42038
1-1/4	1.2500	6	42040
1-5/16	1.3125	6	42042
1-3/8	1.3750	6	42044
1-7/16	1.4375	6	42046
<b>1-1/4" Weldon Shank - 2" D.O.C.</b>			
1-1/2	1.5000	6	42048
1-9/16	1.5625	8	42050
1-5/8	1.6250	8	42052
1-11/16	1.6875	8	42054
1-3/4	1.7500	8	42056
1-13/16	1.8125	8	42058
1-7/8	1.8750	8	42060
1-15/16	1.9375	10	42062
2	2.0000	10	42064
<b>1-1/4" Weldon Shank - 3" D.O.C.</b>			
2-1/16	2.0625	10	43066
2-1/8	2.1250	10	43068
2-3/16	2.1875	10	43070
2-1/4	2.2500	10	43072
2-5/16	2.3125	10	43074
2-3/8	2.3750	10	43076
2-7/16	2.4375	10	43078
2-1/2	2.5000	10	43080
2-9/16	2.5625	10	43082
2-5/8	2.6250	10	43084
2-11/16	2.6875	10	43086
2-3/4	2.7500	10	43088
2-13/16	2.8125	10	43090
2-7/8	2.8750	10	43092
2-15/16	2.9375	10	43094
3	3.0000	10	43096
3-1/16	3.0625	10	43098

## Grind Downs

Hougen Annular Cutters can be made available in non-standard diameters by grinding down the O.D. to the requested size. The chart below lists the grind down range available for each cutter series and nominal diameter range. Please refer to the Industrial Price List for details on how to price grind downs.

<b>Official Grind Down Limits</b>		
Dia. Range	Minimum (Inches)	Maximum (Inches)
<b>RotaCut™ (11,000-Series)</b>		
1/4", 9/32", 6mm, 7mm	No Grind Down	
5/16" - 17/32"	.0015	.0070
8mm - 14mm	.0015	.0070
9/16" - 1-1/2"	.0020	.0100
15mm - 25mm	.0020	.0100
<b>"12,000-Series"</b>		
7/16", 1/2", 12mm, 13mm	.0020	.0100
9/16" - 1-5/16"	.0020	.0150
14mm - 34mm	.0020	.0150
1-3/8" - 2-3/8"	.0020	.0200
35mm - 51mm	.0020	.0200
<b>"42,000-Series"</b>		
7/16" - 11/16"	.0020	.0100
3/4" - 13/16"	.0020	.0150
7/8" - 2"	.0020	.0200
<b>"43,000-Series"</b>		
2-1/16" - 3-1/16"	.0020	.0200
<b>"53/54/56,000-Series" &amp; "63/64/66,000-Series"</b>		
3/4", 13/16", 20mm	.0020	.0150
7/8" - 4"	.0020	.0313
21mm - 78mm	.0020	.0313




Rotamagic™ Concentrated Cutting Fluid is water soluble and yields a 10:1 ratio when mixed with water.

Slick-Stik™ is softer than other stick lubricants for easy application, superior adhesion to the tool, assuring thorough coverage. Use with ferrous or non-ferrous materials.

<b>ROTAMAGIC CUTTING FLUID &amp; SLICK-STIK™ LUBRICANT</b>	
Part No.	Description
11741-12	(12) 1 Pint Bottles - makes 1 pint each, 12 pints total
11742-4	(4) 1 Gallon Bottles - makes 11 gallons each, 44 gallons total
11743	(1) 5 Gallon Pail - makes 55 gallons total
11745-6	(6) 16 oz. Slick-Stik Lubricant
11746-12	(12) 1.68 oz. Slick-Stik Lubricant
11746-24	(24) 1.68 oz. Slick-Stik Lubricant in display box

# ROTABROACH® CUTTER DIMENSIONS

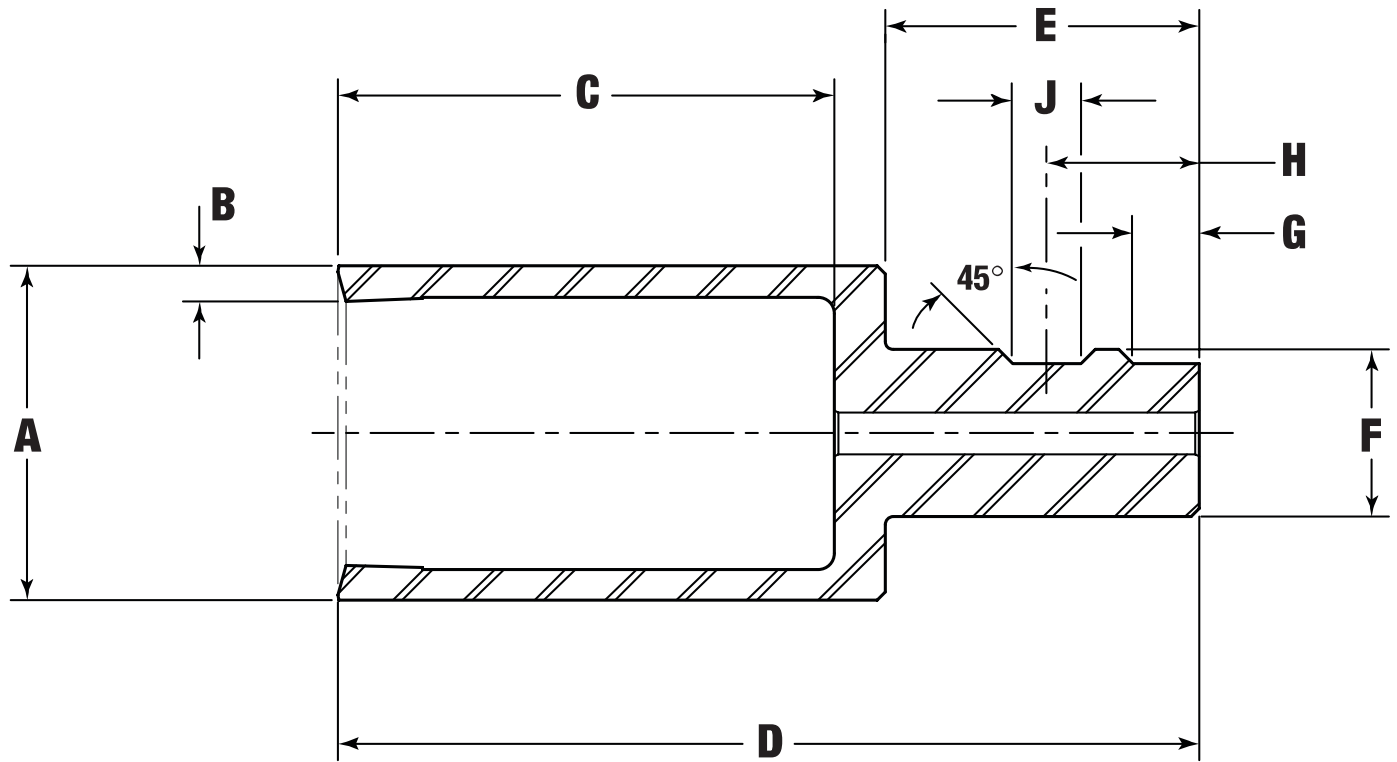

Cutter Series	Depth of Cut	A <sup>+0.000 -0.001</sup>	B	C	D	E	F <sup>+0.0000 -0.0005</sup>	G <sup>±.031</sup>	H <sup>±.015</sup>	J <sup>+0.002 -0.000</sup>
(Part No.)	(D.O.C.)	Outer Dia.	Wall Thickness	Inside Depth	Overall Length	Shank Length	Shank Dia.	1st Flat	Screw C/L	2nd Flat Width
“22,000” “42,000”	2”	3/4” - 1”	.196	2.37	4.72	2.10	3/4” Weldon	----	1.015	.455
		1-1/16” - 1-7/16”	.188		4.97	2.35	1-1/4” Weldon	.50	1.141	.515
		1-1/2” - 2”								
“23,000” “43,000”	3”	2-1/16” - 3-1/16”	.218	3.42	6.02					
“33,000” “53,000” “63,000”	3”	3/4” - 1-7/16”	(.264)*	3.67	6.15	2.10	3/4” Weldon	----	1.015	.455
		1-1/2” - 3-1/16”	.264	3.71	6.44	2.35	1-1/4” Weldon	.50	1.141	.515
		3-1/8” - 4”			6.85	2.76	1-1/2” Weldon	.56	1.187	
“34,000” “54,000” “64,000”	4”	3/4” - 1-7/16”	(.264)*	4.67	7.15	2.10	3/4” Weldon	----	1.015	.455
		1-1/2” - 3-1/16”	.264	4.71	7.44	2.35	1-1/4” Weldon	.50	1.141	.515
		3-1/8” - 4”			7.85	2.76	1-1/2” Weldon	.56	1.187	
“36,000” “56,000” “66,000”	6”	3/4” - 1-7/16”	(.264)*	6.67	9.15	2.10	3/4” Weldon	----	1.015	.455
		1-1/2” - 3-1/16”	.264	6.71	9.44	2.35	1-1/4” Weldon	.50	1.141	.515
		3-1/8” - 4”			9.85	2.76	1-1/2” Weldon	.56	1.187	

\* Nominal Tooth Width varies with the following parameters:

- Cutter diameters manufactured as grind downs must also take into account wall thickness reduction as a result.
- 3/4" diameter "53, 54 & 56,000-Series" feature a nominal wall thickness of .207"
- 13/16" diameter "53, 54 & 56,000-Series" feature a nominal wall thickness of .238"

# ROTABROACH® DATA FOR MACHINING CENTERS

The following charts contain information required for calculating speeds and feeds for use of Rotabroach Industrial Cutters in Machining Centers. A Rotabroach Speeds & Feeds Calculator is also available on the Hougen website for free download to your computer. Please note that the suggested speeds and feeds are to be used as starting points. Adjustments may be required depending on application and workpiece conditions.

## Material Cutting Speed: Surface Feet per Minute (SFM)

Type of Material	Brinell Hardness	Cutting Speed (sfm)	Tool Material
<b>Aluminum</b> <ul style="list-style-type: none"> <li>• Wrought &amp; Cast</li> <li>• Die cast 360.0, 380.0</li> <li>383.0, 413.0</li> <li>390.0, 392.0</li> </ul>	* 30-150	500-1000	M2
	* 40-125	450-600	M2
	* 40-125	450-600	M2
	* 40-125	75-100	M2
<b>Brass &amp; Bronze</b>	----	300-600	M2
<b>Cast Iron</b> <ul style="list-style-type: none"> <li>• Soft</li> <li>• Medium</li> <li>• Chilled</li> </ul>	120-150	75-125	M2
	160-220	50-100	M2/Premium
	230-300	30-50	Premium
<b>Malleable Iron</b> <ul style="list-style-type: none"> <li>• Ferritic</li> <li>• Pearlitic</li> <li>• Tempered Matensite</li> </ul>	110-160	100-130	M2
	160-220	75-100	M2
	200-320	30-60	Premium
<b>Magnesium</b>	* 50-90	400-800	M2
<b>Nickel Alloys</b> <ul style="list-style-type: none"> <li>• 200-230</li> <li>• Monel 400-404</li> <li>• Monel K500, 502</li> </ul>	80-170	60-80	M2
	115-240	35-50	M2
	150-330	20-40	Premium
<b>Steel Free Machining</b>	----	105-130	M2
<b>Carbon Steel</b> <ul style="list-style-type: none"> <li>• 10xx, 12xx, xx10, xx20</li> </ul>	125-160	90-110	M2
<b>Steel Alloys Soft</b> <ul style="list-style-type: none"> <li>• 10xx, 12xx, xx10, xx20</li> <li>• 41xx, 51xx, xx30, xx40</li> <li>• 52xx, 93xx, xx50, xx100</li> </ul>	170-210	65-90	M2
	220-250	55-75	M2
	260-300	35-50	M2/Premium
<b>Steel Alloys Hard</b>	325-400	30-40	Premium/Super
	210-250	35-60	M2/Premium
<b>Tool Steel</b> <ul style="list-style-type: none"> <li>• T15, M42, D2</li> <li>• M2, A2</li> <li>• S6, H13</li> </ul>	210-250	35-60	M2/Premium
<b>Forgings</b>	----	40-50	M2
<b>Armor Plate</b>	200-250	40-55	M2/Premium
	250-300	30-45	Premium/Super
<b>Stainless Steel Ferritic</b> <ul style="list-style-type: none"> <li>• 430/405</li> <li>• 430F</li> </ul>	135-185	90-125	M2
<b>Stainless Steel Austenitic</b> <ul style="list-style-type: none"> <li>• Lower BHN</li> <li>• Higher BHN</li> <li>• 309/316</li> <li>• 301/304</li> <li>• 303/203EZ</li> </ul>	135-185	55-75	M2
	225-275	40-70	M2
	275-325	25-35	Premium
<b>Stainless Steel Nitronic (Low Alloy)</b>	275-325	25-35	Premium
<b>Stainless Steel Martensitic</b> <ul style="list-style-type: none"> <li>By Hardness Range</li> <li>• 501</li> <li>• 416/440F</li> </ul>	135-185	70-125	M2
	185-240	45-110	M2
	275-325	35-55	Premium
	375-425	30-55	Super Premium
<b>Stainless Steel Precipitation Hardening</b> <ul style="list-style-type: none"> <li>By Hardness Range</li> <li>• 17-4 PH</li> </ul>	150-200	45-55	M2
	275-325	40-50	Premium
	325-375	35-45	Super Premium
<b>Inconel</b> <ul style="list-style-type: none"> <li>• 600/Hastelloy B, C, X, S</li> </ul>	140-220	12-18	M2/Premium
	240-310	10-15	Premium
<b>Inconel</b> <ul style="list-style-type: none"> <li>• 718/Waspelloy</li> </ul>	200-300	10-15	M2/Premium
	300-400	7-12	Premium/Super
<b>Inconel</b> <ul style="list-style-type: none"> <li>• 700/Rene 41</li> </ul>	225-300	10-15	M2/Premium
	300-400	7-12	Premium/Super

## Feed Per Tooth (FPT)

Material or Application Type	Feed per Tooth (Inches)
• Thin-Walled Workpieces	.001/.002
• Curved Entry Surfaces	(.003 for work-hardening material)
• Semi-Circle	
• Fragile Setups	
• Soft/Gummy Materials	.004/.005
• Average Applications	.003/.004
• Deep Holes	.004/.005

## Material Tensile Strength (Kc)

Material Type	BHN Hardness	Tensile Strength (Kc)
Free Machining & Low Carbon Steel	----	239,200
Carbon Steel	----	254,000
	125-160	283,000
Alloy Steel (soft)	----	297,000
	170-210	312,300
Alloy Steel (med. hard)	----	326,000
	220-250	341,000
Tool Steel (hot & cold worked)	210-250	355,000
Alloy Steel (hard)	260-300	370,000
Stainless Steel	----	370,000
Cast Iron	180 max.	167,000
	180-250	196,000
	250-300	255,000
Aluminum	----	106,000

## Material Tensile Strength (Kc)

Rockwell Hardness "C" Scale	Brinell Hardness
20	226
25	253
28	271
30	286
32	301
34	319
36	336
38	353
40	371
43	400

## Conversion Chart: SFM to RPM

Cutter Dia. (Inches)	Surface Feet per Minute									
	10	20	30	40	50	60	70	80	90	100
	Revolutions per Minute (RPM)									
.7500	51	102	153	204	255	306	357	407	458	509
.8750	44	87	131	175	218	262	306	349	393	437
1.0000	38	76	115	153	191	229	267	306	344	382
1.1250	34	68	102	136	170	204	238	272	306	340
1.2500	31	61	92	122	153	183	214	244	275	306
1.3750	28	56	83	111	139	167	194	222	250	278
1.5000	25	51	76	102	127	153	178	204	229	255
1.6250	24	47	71	94	118	141	165	188	212	235
1.7500	22	44	65	87	109	131	153	175	196	218
1.8750	20	41	61	81	102	122	143	163	183	204
2.0000	19	38	57	76	95	115	134	153	172	191
2.1250	18	36	54	72	90	108	126	144	162	180
2.2500	17	34	51	68	85	102	119	136	153	170
2.3750	16	32	48	64	80	96	113	129	145	161
2.5000	15	31	46	61	76	92	107	122	138	153
2.6250	15	29	44	58	73	87	102	116	131	146
2.7500	14	28	42	56	69	83	97	111	125	139
2.8750	13	27	40	53	66	80	93	106	120	133
3.0000	13	25	38	51	64	76	89	102	115	127
3.1250	12	24	37	49	61	73	86	98	110	122
3.2500	12	24	35	47	59	71	82	94	106	118
3.3750	11	23	34	45	57	68	79	91	102	113
3.5000	11	22	33	44	55	64	76	87	98	109
3.6250	11	21	32	42	53	63	74	84	95	105
3.7500	10	20	31	41	51	61	71	81	92	102
3.8750	10	20	30	39	49	59	69	79	89	99
4.0000	10	19	29	38	48	57	67	76	86	95

To compute RPM's for cutting speeds other than those shown, either select two speeds from the table that add up to the speed desired and then add their RPM's, or select a factor which, when multiplied by one of the speeds in the table, gives the desired speed and multiply its RPM by the same factor.

Examples: To find the RPM for a 1" diameter cutter run at 150 SFM --

1) Add RPM's for 100 SFM (382) and 50 SFM (191) = 573 rpm

2) Or multiply the RPM for 50 SFM (191) by a factor of 3 = 573 rpm

## Formulas for Calculating Speeds & Feeds

Visit [www.hougen.com](http://www.hougen.com) to use and download the speeds & feeds calculator!

**Area Factor = IN<sup>2</sup>**

$IN^2 = \pi \times [D \times WT] - WT^2$

**Feed Per Tooth = FPT**

(see chart on page xx)

**Horsepower = HP**

$HP = IN^2 \times IPM \times K$

**Inches per Minute = IPM**

$IPM = FPT \times NT \times RPM$

**K (how difficult the material is to machine)**

Steel (K = 1)

Cast Iron (K = .5)

Aluminum (K = .25)

**Outer Diameter = D**

**Material Tensile Strength = Kc**

(see chart on page xx)

**Thrust = T**

$T = .7 \times WT \times FPT \times NT \times Kc$

**Wall Thickness = WT**

.188, .196, .218, .264

(see chart on page xx)

**NT = No. of Teeth**

(divide by 2 for tools with Hougen Edge)

**Surface Feet per Minute = SFM**

$SFM = [\pi \times D \div 12] \times RPM$

**Revolutions per Minute = RPM**

$RPM = SFM \div [\pi \div 12] \times OD$

## Area Factors (IN<sup>2</sup>)

Cutter Dia. (Inches)	Decimal Equivalent	Cutter Series	
		"53,000"	"42,000" "43,000"
3/4	.7500	.403	.332
13/16	.8125	.455	.369
7/8	.8750	.507	.406
15/16	.9375	.559	.443
1	1.0000	.610	.480
* 1-1/64	1.0156	.623	----
1-1/16	1.0625	.662	.516
1-1/8	1.1250	.714	.553
1-3/16	1.1875	.766	.590
1-1/4	1.2500	.818	.627
1-5/16	1.3125	.870	.664
1-3/8	1.3750	.921	.701
1-7/16	1.4375	.973	.738
1-1/2	1.5000	1.025	.775
* 1-33/64	1.5156	1.038	----
1-9/16	1.5625	1.077	.812
1-5/8	1.6250	1.129	.849
1-11/16	1.6875	1.181	.886
1-3/4	1.7500	1.232	.923
1-13/16	1.8125	1.284	.959
1-7/8	1.8750	1.336	.996
1-15/16	1.9375	1.388	1.033
2	2.0000	1.440	1.070
* 2-1/64	2.0156	1.453	----
2-1/32	2.0313	1.466	----
2-1/16	2.0625	1.492	1.263
2-1/8	2.1250	1.543	1.306
2-3/16	2.1875	1.595	1.349
2-1/4	2.2500	1.647	1.392
2-5/16	2.3125	1.699	1.434
2-3/8	2.3750	1.751	1.477
2-7/16	2.4375	1.803	1.520
2-1/2	2.5000	1.854	1.563
* 2-33/64	2.5156	1.867	----
2-17/32	2.5313	1.880	----
2-9/16	2.5625	1.906	1.606
2-5/8	2.6250	1.958	1.648
2-11/16	2.6875	2.010	1.691
2-3/4	2.7500	2.062	1.734
2-13/16	2.8125	2.114	1.777
2-7/8	2.8750	2.166	1.820
2-15/16	2.9375	2.217	1.862
3	3.0000	2.269	1.905
* 3-1/64	3.0156	2.282	----
3-1/16	3.0625	2.321	1.948
3-1/8	3.1250	2.373	----
3-1/4	3.2500	2.477	----
3-3/8	3.3750	2.580	----
3-1/2	3.5000	2.684	----
3-5/8	3.6250	2.788	----
3-3/4	3.7500	2.891	----
3-7/8	3.8750	2.995	----
4	4.0000	3.099	----

Wall Thickness Note

"42,000-Series" = 0.188" for 3/4" thru 2" dia.

"43,000-Series" = 0.218" for 2-1/16" thru 3-1/16 dia.

"53,000-Series" = 0.264" for all diameters.

# OUR COMMITMENT TO PROVIDE YOU WITH HOLEMAKING INNOVATIONS

At Hougen, we want you to make more holes, more often, in more places all in less time... profitably. To that end, Hougen engineers are constantly striving to bring you the right tools.

Rotabroach Industrial Cutters are just one of a family of holemaking products that can be found on the production floor or the job-site.

Ask your distributor about how Hougen's other fine products can improve your holemaking productivity.

## Hougen® Portable Magnetic Drills

Fourteen models to choose from including six with quill feed arbors for increased efficiency and performance. Drill 7/16" to 3-1/16" dia. holes through up to 3" stock in the shop or in the field.



## Punch Pro® Hole Punchers

The PUNCH-PRO line of Electro-hydraulic Hole Punchers – ideal for flat, channel, H-steel, and lip channel, to punch round and oblong holes in as fast as 1.5 seconds. Five models start at just 28.6 lb, operate on standard 115V electric power, and with power ranges available to punch round holes from 5/32" to 15/16" diameter thru materials up to 1/2" thick.




### Hougen Patent Notice

The products covered in this catalog may be covered by one or more of the following U.S. patents, foreign patents, and pending patents.

4619532	4632610	4952102	5145296
5902076	6280123	D445808	D447494

Photographs and specifications are accurate in detail at time of printing. Manufacturer reserves the right to make improvements and modifications to designs without prior notice.

Hougen, Hougen-Edge, Rotabroach, Trak-Star and Punch-Pro and their respective logos are proprietary trademarks of Hougen Manufacturing, Inc. Ogura and the Ogura logo are proprietary trademarks of Ogura & Co., Ltd., Partner is a registered trademark of Partner Industrial Products, Vac-Pad is a proprietary trademark of Drillmate PTY, Ltd.

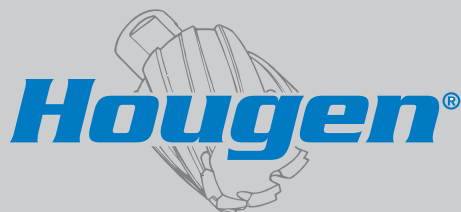

### HOUGEN MANUFACTURING, INC.

P.O. Box 2005 • Flint, MI 48501  
3001 Hougen Drive • Swartz Creek, MI 48473  
Ph: (810) 635-7111 • Fax: (810) 635-8277  
E-mail: [info@hougen.com](mailto:info@hougen.com)  
Online: [www.hougen.com](http://www.hougen.com)



Distributed By: